


330PS 430PS

PRISM SCOPES



The 5 illumination levels allow the user to adjust to all outdoor light conditions. The reticle is etched directly on the prism and the windage and elevation turrets are precisely machined to ensure accuracy.



- More than 120 MOA adjustment range
- 5 illumination levels
- Fully multi-coated & long eye relief & large FOV
- IPX7 waterproof
- Fog resistant








SPECIFICATIONS

	330PS	430PS
Magnification	3x	4x
Objective lens diameter	27.5 mm	30 mm
FOV	6.2°	4.75°
Reticle type	Prism reticle, illuminated	Prism reticle, illuminated
Reticle Color	Red, Green	Red, Green
Turret Style	External	External
Brightness control	Mechanical 5 levels	Mechanical 5 levels
Allowed parallax at 50/100 yds	100/ ≤0.75MOA	100/ ≤0.75MOA
Diopter Adjustment	+2 ~ -2 dpt	+2 ~ -2 dpt
Exit Pupil Diameter	7.7 mm	7.7 mm
Eye releif	80 mm	80.4 mm
Point of aim shift after turret adjustment	≤1 MOA	≤1 MOA
Adjustment range	≥±25	≥±25
Click Adjustment Value	0.5 MOA ± 15%	0.5 MOA ± 15%
Point of aim shift after recoil	≤1 MOA	≤1 MOA
Shockproof	800 G	800 G
Waterproof	1.0 m / 30 Min	1.0 m / 30 Min
Nitrogen filled	Yes	Yes
Fogproof	55±3°C / 2Min	55±3°C / 2Min
Color	Black	Black
Center Height	35.6 mm	35.6 mm
Battery	One CR2032	One CR2032
Weight	489 g (1.07 lbs)	520 g (1.14 lbs)
Size	116x58x76 mm (4.5 x 2.2 x 2.9 in)	142x63x76 mm (5.5 x 2.4 x 2.9 in

Specifications are subject to change without notice. Images are for illustration purposes only.

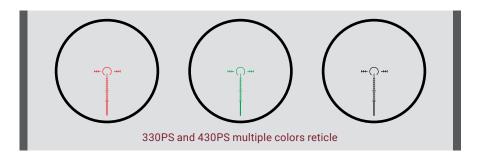



 $173\ West\ Main\ Street\ |\ PO\ Box\ 962\ |\ Springerville,\ AZ\ 85938$ Tel. $928.333.4300\ |\ Fax\ 480.393.4882\ |\ info@agmglobalvision.com$